




Block Irrigation System

3/4" LANDSCAPE FUSIBLE SERVICE SADDLE

- 100% Corrosion resistant with NO Metal Components.
- PE4710 bimodal resin with a PENT value of >10,000 hours per ASTM F1473**
- Pressure Rated at 335 PSI
- For use on PE4710 or PE100 pipe
- Eliminates Mechanical Saddle and Compression Service Tee Leaks
- Available in Imperial and Metric Sizes

****Note:** PE4710 bimodal resin with a PENT value at 2.4 MPa and 80 °C of >10,000 hours per ASTM F1473 and it is listed by the Plastics Pipe Institute (PPI TR-4, as both PE 4710 and PE 100) and is certified to ANSI/NSF Standard 14, ANSI/NSF Standard 61, CSA B137.1 and CSA B137.4

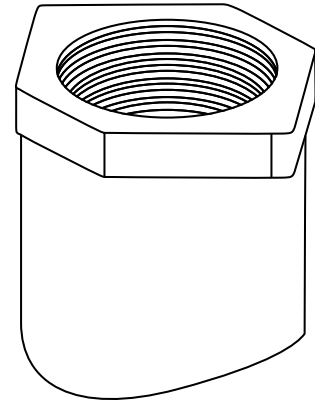

Part Number IPS	Description	PE4710 DR
AFLS07-010	AquaSaddle 1 IPS 0.75 FIPT PE4710 BS ROUND BASE	7-11
AFLS07-012	AquaSaddle 1.25 IPS 0.75 FIPT PE4710 BS ROUND BASE	7-11
AFLS07-015	AquaSaddle 1.5 IPS 0.75 FIPT PE4710 BS ROUND BASE	7-13.5
AFLS07-020	AquaSaddle 2 IPS 0.75 FIPT PE4710 BS ROUND BASE	7-17
AFLS07-030	AquaSaddle 3 IPS 0.75 FIPT PE4710 BS ROUND BASE	7-17
AFEL07-010	AquaSaddle End of Line 1 IPS 0.75 FIPT PE4710 BS FLAT	7-17

Part Number Metric	Description	PE100 DR
AFLS07-040	Aquasaddle 40 Metric 0.75 FIPT PE4710 BS ROUND BASE	7.4-11
AFLS07-050	Aquasaddle 50 Metric 0.75 FIPT PE4710 BS ROUND BASE	7.4-13.6
AFLS07-063	Aquasaddle 63 Metric 0.75 FIPT PE4710 BS ROUND BASE	7.4-17
AFLS07-075	Aquasaddle 75 Metric 0.75 FIPT PE4710 BS ROUND BASE	7.4-17
AFLS07-090	Aquasaddle 90 Metric 0.75 FIPT PE4710 BS ROUND BASE	7.14-17

CMF
GLOBAL
www.cmfglobal.com

2445 Fenton Street
Chula Vista, CA 91914-3517
Telephone: 1-619-869-8919
Fax: 1-619-330-4532
1-877-586-6060 24 Hour Technical Hotline

In AquaFusion We Trust™