




Block Irrigation System

1" LANDSCAPE FUSIBLE SERVICE SADDLE

- 100% Corrosion resistant with NO Metal Components.
- PE4710 bimodal resin with a PENT value of >10,000 hours per ASTM F1473**
- Pressure Rated at 335 PSI
- For use on PE4710 or PE100 pipe
- Eliminates Mechanical Saddle and Compression Service Tee Leaks
- Available in Imperial and Metric Sizes

****Note:** PE4710 bimodal resin with a PENT value at 2.4 MPa and 80 °C of >10,000 hours per ASTM F1473 and it is listed by the Plastics Pipe Institute (PPI TR-4, as both PE 4710 and PE 100) and is certified to ANSI/NSF Standard 14, ANSI/NSF Standard 61, CSA B137.1 and CSA B137.4

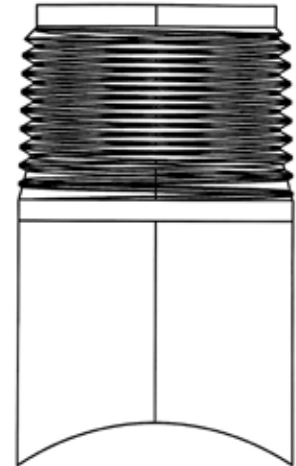

Part Number IPS	Description	PE4710 DR
AFCF010-010	AquaSaddle 1 IPS 1 MIPT PE4710 BS ROUND BASE	7-11
AFCF010-012	AquaSaddle 1.25 IPS 1 MIPT PE4710 BS ROUND BASE	7-11
AFCF010-015	AquaSaddle 1.5 IPS 1 MIPT PE4710 BS ROUND BASE	7-13.5
AFCF010-020	AquaSaddle 2 IPS 1 MIPT PE4710 BS ROUND BASE	7-17
AFCF010-030	AquaSaddle 3 IPS 1 MIPT PE4710 BS ROUND BASE	7-17
AFCF010-000	AquaSaddle End of Line 1 IPS 1 MIPT PE4710 BS FLAT	7-17

Part Number Metric	Description	PE100 DR
AFCF010-040	AquaSaddle 40mm 1 MIPT PE4710 BS ROUND BASE	7.4-11
AFCF010-050	AquaSaddle 50mm 1 MIPT PE4710 BS ROUND BASE	7.4-13.6
AFCF010-063	AquaSaddle 63mm 1 MIPT PE4710 BS ROUND BASE	7.4-17
AFCF010-075	AquaSaddle 75mm 1 MIPT PE4710 BS ROUND BASE	7.4-17
AFCF010-090	AquaSaddle 90mm 1 MIPT PE4710 BS ROUND BASE	7.4-17

CMF
GLOBAL
www.cmfglobal.com

2445 Fenton Street
Chula Vista, CA 91914-3517
Telephone: 1-619-869-8919
Fax: 1-619-330-4532
1-877-586-6060 24 Hour Technical Hotline

In AquaFusion We Trust™